Technical data

Indications about the technical data

Vehicle identification data

The values indicated in the technical data may differ depending on optional equipment or version of the model, as well as in the case of special vehicles and equipment for certain countries.

The information in the official vehicle documentation takes precedence at all times.

Abbreviations used in the Technical Specifications section

kW	Kilowatt, engine power measurement.
PS	Horsepower (not currently used), engine power measurement unit.
rpm, 1/min	Revolutions per minute – engine speed.
Nm	Newton metres, unit of engine torque.
CZ	Cetane number, indication of the diesel combustion power.
RON	Research octane number, indication of the knock resistance of petrol.

Vehicle Identification Number (VIN)

The vehicle ID number can be found in the following places:

- In the infotainment system using the function button **Vehicle > Settings > Service**.
- Front, visible through the small window on the lower left side of the windscreen.
- On the vehicle's data label.
- To the right in the engine compartment.

Type plate

The type plate is located on the vehicle's right hand door frame. Vehicles for certain export countries do not have a type plate.

Performance

The values apply only to optimal road and weather conditions.

The vehicle's performance has been calculated without any equipment that would affect it, e.g. accessories.

Fuel consumption

Approved consumption values are derived from measurements performed or supervised by certified EU laboratories, according to the legislation in force at the time (for more information, see the Publications Office of the European Union on the EUR-Lex website: © European Union, http://eur-lex.europa.eu/) for the specified vehicle characteristics.

The values relating to fuel consumption and CO_2 emissions can be found in the documentation provided to the purchaser of the vehicle at the time of purchase.

Fuel consumption and CO_2 emissions depend on the equipment/features of each individual vehicle, as well as on the driving style, road conditions, traffic conditions, environmental conditions, load or number of passengers.

Tank level

Vehicles with front-wheel drive:	50 l, 7 l reserve
Vehicles with all-wheel drive	55 l, 8.5 l reserve

Adblue® tank volume
approx. 11 l [a]
approx. 13 l [a]

a) The amount filled using a dispenser nozzle may be less. In conditions of extreme cold, the amount filled may be less. The values depend on the equipment.

Weights

The kerb weight values apply to a vehicle that is ready to drive with a driver (75 kg), operating fluids and, if applicable, tools and the spare wheel. The kerb weight increases with

optional equipment and retrofitting of accessories, which reduce the possible payload accordingly.

Load on the roof

The maximum authorised load on the roof of your vehicle is 75 kg.

Trailer weight

The maximum permitted drawbar load on the ball head of the towing bracket is **90 kg**.

⚠ WARNING

The values indicated for the maximum permitted weights must not be exceeded. There is a risk of accident and damage!

Engine specifications

Petrol engines	1.0 TSI Start-Stop	1.4 TSI Start-Stop	1.5 TSI Start-Stop	
Power output in kW (hp) at 1/min	85 (116)/5,500	110 (150)/5,000-6,000	110 (150)/5,000-6,000	
Maximum torque (Nm at 1/min)	a)	250/1,500-3,500	250/1,500-4,000	
No. of cylinders/displacement (cm³)	3/999	4/1,395	4/1498	
Fuel	Super 95 / Normal 91 (with a slight power loss) ROZ			
Gearbox / traction	manual / front	DSG / front	manual / front	DSG / front
Top speed (km/h)	a)	195 (VI)	202 (V)	202 (V)
Acceleration from 0-100 km/h (s)	a)	9.1	9.0	9.0
Maximum authorised weight (kg)	a)	1,930	1,930	1,940

a) Data not available as this edition goes to print.

Diesel engines	2.0 TDI CR Start-Stop	2.0 TDI CR Start-Stop
Power output in kW (hp) at 1/min	105 (143)/3,500-4,000	110 (150)/3,000-4,200
Maximum torque (Nm at 1/min)	320/1,750-3,000	360/1,600-2,750
No. of cylinders/displacement (cm³)	4/1,968	4/1,968
Fuel	EN 590 standard diesel, min. 51 CZ	
Gearbox / traction	DSG / front	DSG / front
Top speed (km/h)	193 (V)	202 (VI)
Acceleration from 0-100 km/h (s)	9.4	9.0
Maximum authorised weight (kg)	1,990	2,030

Dimensions.

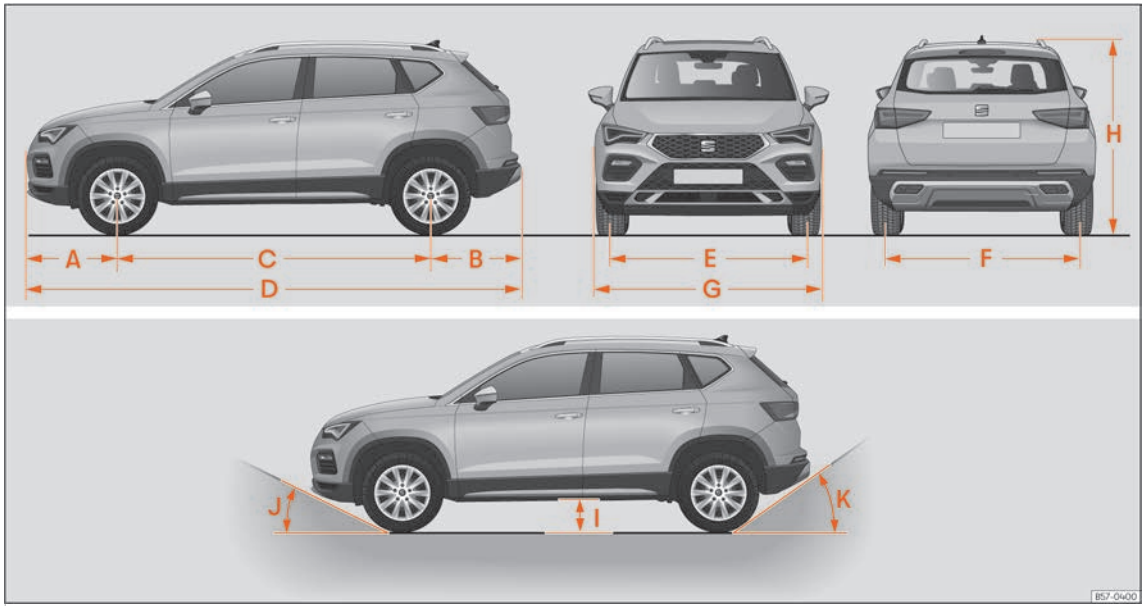

Fig. 236 Dimensions.

››› Fig. 236		ATECA	ATECA 4Drive
A	Front projection (mm)	871	871
B	Rear projection (mm)	872	880
C	Wheelbase (mm)	2,638	2,630
D	Length (mm)	4,381	
E	Front[a] track (mm)	1,576	1,572
F	Rear[a] track (mm)	1,541	1,544
G	Width (mm)	1,841	
H	Height at kerb weight (mm)	1,601[b] 1,615[c]	1,611[b] 1,625[c]
I	Ground clearance between the axles (mm)	176	189
J	Front projection angle limited by the bumper	maximum 18.9°	maximum 19.9°
K	Rear projection angle limited by the bumper	maximum 27.4°	maximum 27.8°
	Turning radius (m)	10.2	

[a] This data will change depending on the type of wheel rim.
[b] Distance to the roof.
[c] Dimension to the roof bars.